

ClimaRad Fan

The ClimaRad Fan is an addition to the ClimaRad (WTW) ventilation unit and provides extraction for socalled 'wet rooms'. The ClimaRad Fan is available in three different versions: the B-Fan, K-Fan and T-Fan. These are suitable for the bathroom, kitchen and toilet, respectively. The Fan measures the humidity and is equipped with a timed control in combination with the ClimaRad 2.0/Sensa. With the radio frequency (RF) communication between the fan and the ClimaRad ventilation unit, not only the living room but also the 'wet rooms' are given a 100% perfect indoor climate in the most simple way.



	Bathroom Fan	Kitchen Fan	Toilet Fan
RH-sensor	\checkmark	\checkmark	-
PIR-sensor	\checkmark	-	\checkmark
Communication via RF	\checkmark	\checkmark	\checkmark
Check valve	\checkmark	\checkmark	\checkmark
<i>Time control + CO₂ control through ClimaRad 2.0/Sensa</i>	\checkmark	\checkmark	\checkmark
CO_2 -sensor (RF)	option	option	option
4-position switch	option	\checkmark	option





ClimaRad Fan

Dimensions:	210x210x122 mm (wxhxd)
Connection:	1 x Ø 100 mm
Air flow (max. at 50 Pa):	100 m ³ /h
Sensors:	RH, PIR, RF (demand-controlled)
Connected power:	15 W (230 VAC/50Hz)
Electrical protection class:	Class I
Specific power input (SPI):	0,07 W/(m³/h)
Standby consumption:	1 W
IP class B-Fan:	44
Accessories (optional:	4-position switch, external CO ₂ sensor (RF)
Energy label:	C
Weight:	1,9 kg




Product information

Sound data

Capacity	Sound level
[m³/h]	[dB(A)]
30	21
50	32
75	44
125	55

* LpA (1 meter)

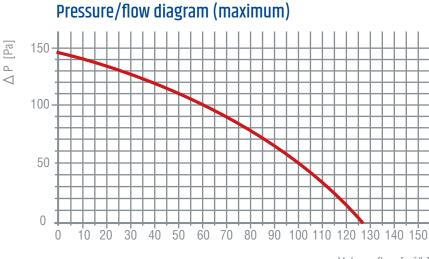

Volume flow [m³/h]

Accessories (optional)



ClimaRad external CO₂-sensor (RF)

The external CO_2 sensor is an option which can be used in combination with the ClimaRad Fan, MiniBox or MaxiBox. By linking an external CO_2 sensor to the ClimaRad ventilation solution, the ventilation will be demand-driven, based on the measured CO_2 level.

T.	0
(o —
AUTO	III • 30min •• Continu

ClimaRad 4-position switch (RF)

By way of the wireless 4-position switch the ClimaRad Fan can be manually operated:

1: Low 2: Medium 3: High Auto: Automatic



ClimaRad BV

Lübeckstraat 25 7575 EE Oldenzaal The Netherlands Tel. +31 (0) 541 358 130 e-mail: info@climarad.com www.climarad.co.uk



View the ClimaRad Solutions for the residential, commercial and healthcare markets.